


## ◆ 订购码 Ordering Code



IWPT

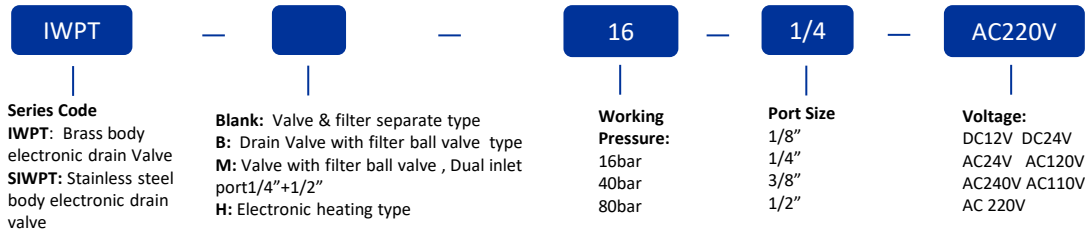

IWPTB



IWPTH

## ◆ 规格 Specification

<b>Interval time</b>	0.5 to 45 minutes, adjustable	<b>Valve</b>	IWPT-16, IWPTB-16, IWPTM-16, IWPTH-16
<b>Discharge time</b>	0.5 to 10seconds, adjustable	<b>Type</b>	2/2-way direct acting
<b>Manual TEST switch</b>	Micro switch	<b>In/Out ports</b>	1/4", 3/8" and 1/2" BSPP or NPT
<b>Supply voltage</b>	24-240V AC/DC 50/60Hz/12 to 380 VAC/DC 50/60Hz	<b>Max. working pressure</b>	0~16Bar,40Bar,80Bar
<b>Current consumption</b>	4mA maximum	<b>Orifice</b>	4.5 mm orifice (High pressure 2.0mm)
<b>Environmental protection</b>	IP65 IP65,NEMA4, IP65-EN60529	<b>Max Media temperature</b>	Max. 90° C
<b>Environment temperature</b>	-40℃—+50℃/ -40° Celcius to 50° Celcius	<b>Defend grade</b>	IP65, NEMA4
<b>Housing material</b>	ABS plastic	<b>Insulation</b>	Thermal group H (200° C)
<b>Connection</b>	DIN43650A /DIN 43650 - A/ISO 4400	<b>Valve seals</b>	FPM (Viton) seals Forged brass
<b>Indicators light</b>	Green-on, Red-off	<b>Mounting Positions</b>	Horizontally or Vertically