




DSN-25X40



DSN-10X50

## ◆ 订购码 Ordering Code

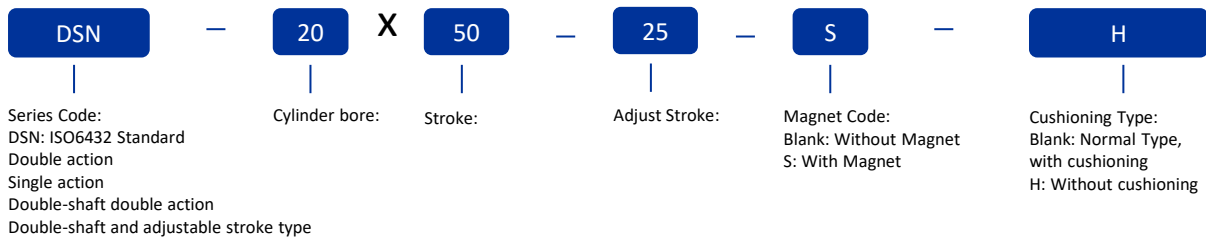

## ◆ 规格 Specification

Bore (mm)	8	10	12	16	20	25	32	40
Motion Pattern	Double Action							
Working Medium	Air							
Fixed Type	Normal type FA Type SDB Type LB Type TC Type							
Working Pressure Range	0.1~0.9MPa							
Ensured Pressure Resistance	1.35MPa							
Operating Temperature Range	-5~70℃							
Operating Speed Range	50~800mm/s							
Buffer Type	Adjustable Buffer							
Port Size	M5X0.8				G1/8"			

## ◆ 行程 Stroke

Bore(mm)	Standard Stroke	Max Stroke
8	10.25. 40 .50. 80 .100	300
10		
12	10.25. 40 .50. 80 .100.125.160. 200	
16		
20	25. 40 .50. 75.80 .100.125.150.16 0. 175.200.250.300	500
25		
32		
40	25. 40 .50. 75.80 .100.125.150.16 0. 175.200.250.300.350. 400.450.500	