


◆ 订购码 Ordering Code



CDU 25-30

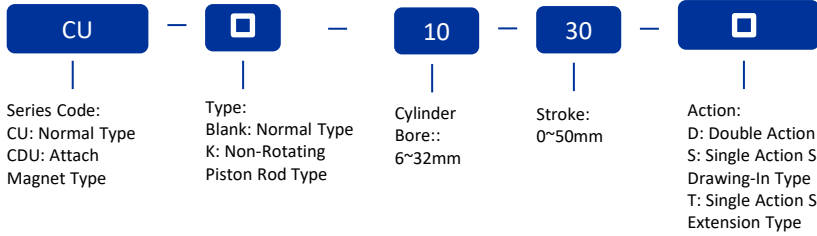

CDUK 16-30

◆ 规格 Specification

Bore (mm)	6	10	16	20	25	32
Motion Pattern	Double action/Single Action Extrusion type/Single Action Drawing-in Type					
Working Medium	Air					
Max Pressure	0.7MPa					
Ensured Pressure Resistance	1.0MPa					
Operating Temperature Range	5~60℃					
Precision of Piston Rod With Non-rotating	±0.8°			±0.5°		
Buffering	Both Ends Buffer					
Margin of Stroke Error(mm)	+1.0					
接管口径/Port Size	M5X0.8					G1/8"