


◆ 订购码 Ordering Code

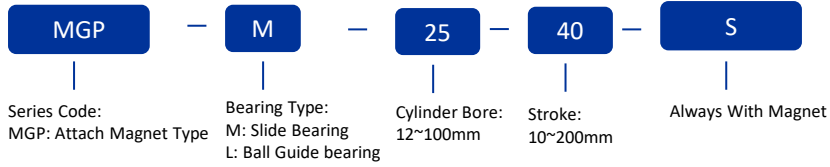

◆ 规格 Specification

Bore(mm)	12	16	20	25	32	40	50	63	80	100
Working Medium	Air									
Motion Pattern	Double-action									
Ensured Pressure Resistance	1.5Mpa(15.3kgf/cm ²)									
Max. Operating Pressure	1.0Mpa(10.2kgf/cm ²)									
Min. Operating Pressure	0.12Mpa(1.2kgf/cm ²)									
Ambient and Medium Temperature	-10~+60℃									
Piston Speed	50~500mm/s								50~400mm/s	
Buffer	Rubber Cushion									
Tolerance Of Stroke	+1.5 / 0 mm									
Bearing	(Slide Bearing/Ball Guide Bearing)									
Precision Of Piston Rod Non-rotating	Slide Bearing	±0.08°	±0.07°	±0.06°	±0.05°	±0.04°				
	Ball Guide Bearing	±0.10°	±0.09°	±0.08°	±0.06	±0.05°				
Port Size	M5×0.8		G1/8"			G1/4"		G3/8"		