


## ◆ 订购码 Ordering Code

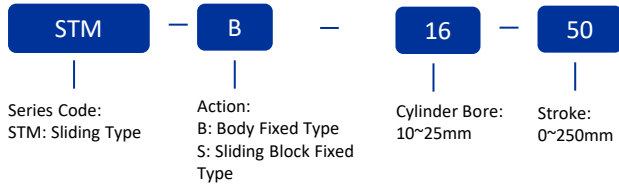

## ◆ 规格 Specification

Bore(mm)	10	16	20	25
Motion Pattern	Double Action			
Working Medium	Air			
Operating Temperature Range	-5~+70°C			
Operating Pressure Range	1.0~9.0kgf/cm <sup>2</sup>			
Ensured Pressure Resistance	13.5kgf/cm <sup>2</sup>			
Operating Speed Range	50~200mm/s			
Buffer Type	NO	Shock Absorber		
Non-Rotating Precision	±0.1°	±0.05°		
Port Size	M5 × 0.8			G1/8"