


◆ 订购码 Ordering Code

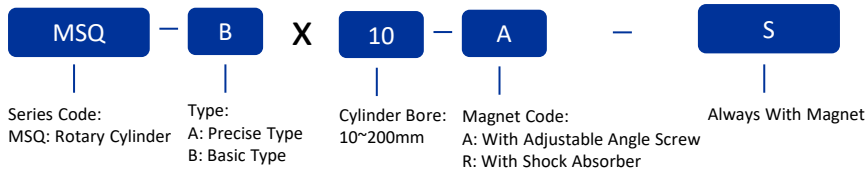

◆ 规格 Specification

Bore(mm)		10	20	30	50	70	100	200
Working Medium		Air(Non-Lube)						
Max.Pressure	With Adjustment Bole	1MPa(10.2kgf/cm ²)						
	R:With Shock Absorber	0.6 MPa (6.1kgf/cm ²)注/Note						
Min.Pressure	Basic Type	0.1 MPa(1.0kgf/cm ²)						
	High Precision Type	0.2 Mpa	0.1 MPa					
Ambient and fluid temperature		0~60℃(No Freezing)						
Cushion	With Adjustment Bole	Rubber Bumper						
	R:With Shock Absorber	Shock Absorber						
Angle Adjustment Range		0~190°						
Maximum Rotation		190°						
Piston Bore		φ15	φ18	φ21	φ25	φ28	φ32	φ40
Port Size	End Ports	M5×0.8			RC1/8"			
	Side Ports	M5×0.8						