


◆ 订购码 Ordering Code

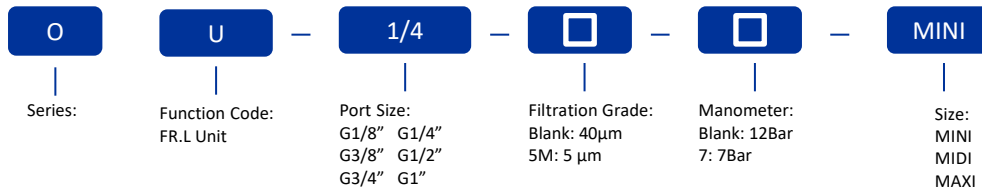

◆ 规格 Specification

Service Units		MINI			MIDI			MAXI	
Manual Drain	Working Pressure: 12Bar, 40µm	OU-1/8-MINI	OU-1/4-MINI	OU-3/8-MINI	OU-3/8-MIDI	OU-1/2-MIDI	OU-3/4-MIDI	OU-3/4-MAXI	OU-1-MAXI
	Working Pressure: 7Bar, 40µm	OU-1/8-7-MINI	OU-1/4-7-MINI	OU-3/8-7-MINI	OU-3/8-7-MIDI	OU-1/2-7-MIDI	OU-3/4-7-MIDI	OU-3/4-7-MAXI	OU-1-7-MAXI
	Working Pressure: 12Bar, 5µm	OU-1/8-5M-MINI	OU-1/4-5M-MINI	OU-3/8-5M-MINI	OU-3/8-5M-MIDI	XOU-1/2-5M-MIDI	OU-3/4-5M-MIDI	OU-3/4-5M-MAXI	OU-1-5M-MAXI
Manometer	0-12Bar	OMA-40-16-1/8			OMA-50-16-1/4				
	0-7Bar	OMA-40-10-1/8			OMA-50-10-1/4				
Medium	Compressed Air								
Structure	Sintered filter with water separator ; MINI, MIDI, MAXI: Piston regulator; Diaphragm type regulator; Direct constant-density lubricator								
Mounting Type	Pipe mounting or foot mounting								
Assemble Position	Vertical ±5°								
Connection	G1/8"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"	
Nominal Flow Rate	XOU-...(-A)	700	1000	1200	2000	2600	2600	2600	7000
	XOU-...-7(-A)	800	1300	1500	2500	2800	2800	2800	8500
	XOU-...-5M(-A)	600	850	1050	1700	1800	1800	2100	6500
Primary	Manual Drain	1~16bar							
	Automatic Drain	1.5~12bar							
Working Pressure	0.5~12bar/0.5~7bar								
Min.Standard Nominal Flow Rate	3 L/min			6 L/min				10 L/min	
Filtration	40µm/5µm								
Capacity Of Condensate Fluid	22ml								
Temperature Range	0~60℃								
Materials Information	Using:Zinc die-casting;Filter bowl and oil bowl:PC;Meta bowl guard:Aluminium alloy;Sealing:NBR;Adjusting knob:POM								