


## ◆ 订购码 Ordering Code

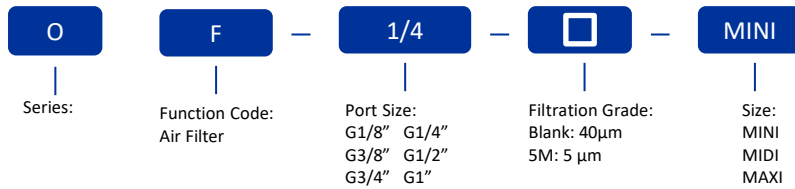

## ◆ 规格 Specification

Service Units		MINI			MIDI			MAXI	
40µm	Manual Drain	OF-1/8-MINI	OF-1/4-MINI	OF-3/8-MINI	OF-3/8-MIDI	OF-1/2-MIDI	OF-3/4-MIDI	OF-3/4-MAXI	OF-1-MAXI
5µm		OF-1/8-5M-MINI	OF-1/4-5M-MINI	OF-3/8-5M-MINI	OF-3/8-5M-MIDI	OF-1/2-5M-MIDI	OF-3/4-5M-MIDI	OF-3/4-5M-MAXI	OF-1-5M-MAXI
Medium		Compressed Air							
Structure		Sintered filter with water separator							
Mounting Type		Pipe mounting or foot mounting							
Assemble Position		Vertical ±5°							
Connection		G1/8"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
Nominal Flow Rate	XOF-...	1000	1200	1400	2700	3000	3000	5000	5300
	XOF-...-5M	600	950	1100	1800	1900	1900	3000	3300
Primary	Manual Drain	1~16bar							
Filtration		40µm/5µm							
Capacity Of Condensate Fluid		22ml							
Temperature Range		0~60℃							
Materials Information		Housing:Zinc die-casting;Filter bowl:PC;Meta bowl guard:Aluminium alloy;Sealing:NBR							