


◆ 订购码

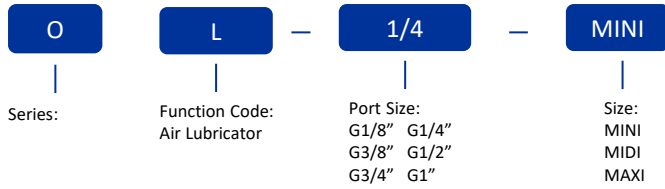

◆ 规格 Specification

Service Units	MINI			MIDI			MAXI	
	OL-1/8-MINI	OL-1/4-MINI	OL-3/8-MINI	OL-3/8-MIDI	OL-1/2-MIDI	OL-3/4-MIDI	OL-3/4-MAXI	OL-1-MAXI
Medium	Compressed Air							
Structure	Sintered filter with water separator ; Direct constant-density lubricator							
Mounting Type	Pipe mounting or foot mounting							
Assemble Position	Vertical $\pm 5^\circ$							
Connection	G1/8"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
Nominal Flow Rate	1300	2300	2700	5500	6100	6300	8400	9000
Max Working Pressure	16bar							
Min.Standard Nominal Flow Rate	3 L/min			6 L/min			10 L/min	
Capacity Of Condensate Fluid	22ml							
Temperature Range	0~60℃							
Materials Information	Using : Zinc die-casting; Oil bowl and drip cap : PC ; Meta bowl guard : Aluminum alloy ; Sealing : NBR							