

## Features

本产品为全不锈钢产品（不锈钢包含阀体，阀杆，手动按钮，先导头，先导座，螺丝）  
 依据 NAMUR 国际标准，适用于双作用执行机构  
 自由交叉式切换  
 带不锈钢手动开关装置  
 适用于恶劣的环境中  
 适用于高温和抗腐蚀，适用酸碱及腐蚀介质。  
 密封材质为氟橡胶  
 可配合防爆线圈使用

Complete Stainless steel material ( Main body, Spool, Armature tube, Manual override )

NAMUR Standard, For double operated actuators

Manual override with and Without detent

Compact design with large flow rate

Suitable for Critical environment. Low and high temperature. Dirty and pollution condition

Corrosion resistant. High temperature resistance.


Seal material : VITON

All valves available with ex protected coils ( ATEX and Other international approvals)




SPM2531-08

## Ordering Code

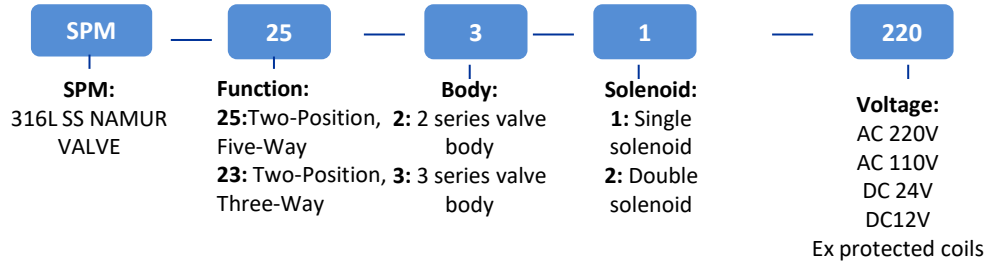

## Overall Dimension

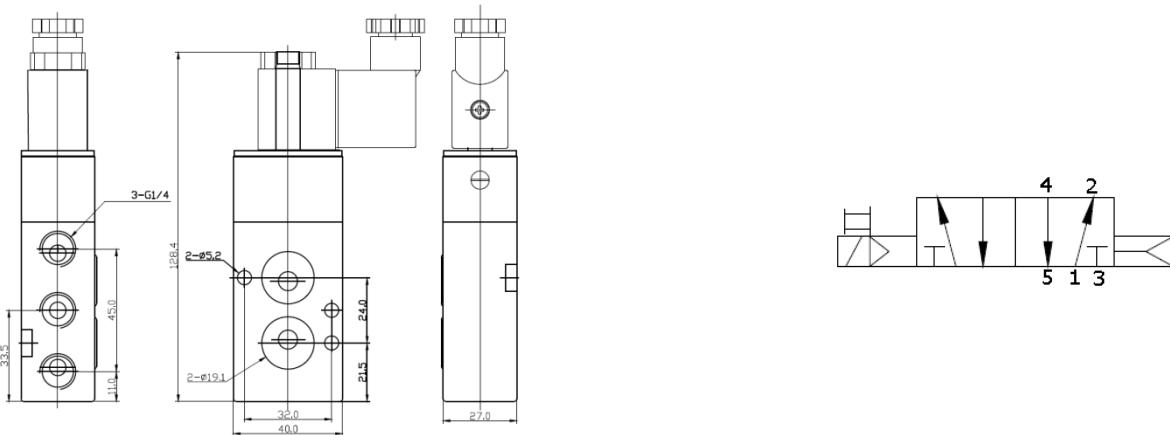

## Technical Data

Model	Medium	Orifice (mm)	Connection	Operating pressure	Operating temperature	Medium temperature	Flow(L/min)	Switching time
SPM2521-06	Air/Gas	5	1/8"	0.1 ~ 1.0 (Mpa)	-20°C ~ 180°C	-10°C ~ 120°C	1200	35(ms)
SPM2521-08			1/4"					
SPM2531-08		6.5	1/4"				1700	35(ms)
SPM2521-10			3/8"					