


## ◆ 订购码 Ordering Code



IWS-2-3/4-A

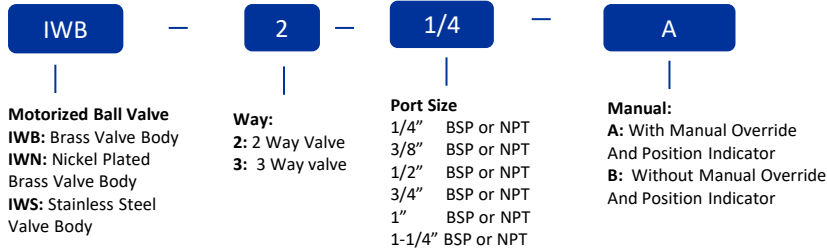

IWB-3-1/2"-B

## ◆ 规格 Specification

Model	IWB(Brass)	IWN(Nickel plated brass )	IWS (Stainless steel )
Operating fluid	Air , Water, Oil		
Ensured pressure resistance	1.6MPa		
Working pressure	0-1.0Mpa, 0~1.2MPa,0-1.6Mpa Optional		
Valve open/Close time	≤5 Seconds, ≤7 Seconds, ≤ 15Seconds Optional		
Rated voltage	AC/DC9~24V, AC110~230V, DC110~250V		
Working current	≤500MA For A20 Actuator, ≤800MA For A100 Actuator		
Life time	100000 times		
Actuator material	Engineering plastics		
Sealing material	EPDM & PTFE		
Actuator rotation	90°		
Max. torque force	2N.M, 4N.M,10N.M Optional		
Cable length	0.5m,1.5m Optional		
Environment temperature	-15℃~50℃		
Fluid temperature	2℃~90℃		
Protection class	IP67		
Indicator & Manual override	Optional		
Cable assembled	0.5M or 1.5M Optional		