


◆ 订购码 Ordering Code



IWPT-S-16

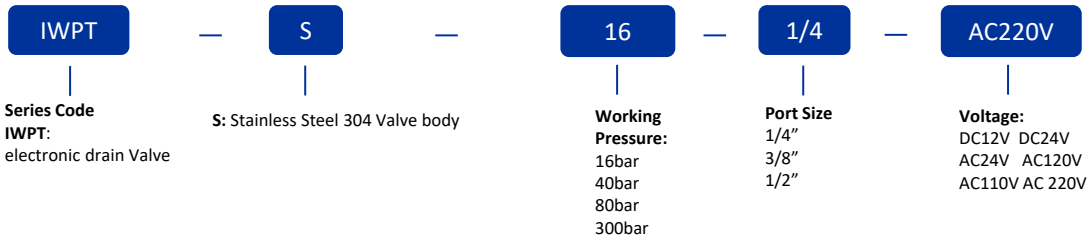

IWPT-S-300

◆ 规格 Specification

Interval time	0.5 to 45 minutes, adjustable	Valve	IWPT-S-16, IWPT-S-40, IWPT-S-80, IWPT-S-300
Discharge time	0.5 to 10seconds, adjustable	Type	2/2-way direct acting
Manual TEST switch	Micro switch	In/Out ports	1/4", 3/8" and 1/2" BSPP or NPT
Supply voltage	24-240V AC/DC 50/60Hz/12 to 380 VAC/DC 50/60Hz	Max. working pressure	0~16Bar,40Bar,80Bar, 300Bar
Current consumption	4mA maximum	Orifice	4.0 mm, 2.5 mm, 2.0mm, 1.0mm
Environmental protection	IP65 IP65,NEMA4, IP65-EN60529	Max Media temperature	Max. 90° C
Environment temperature	-40℃—+50℃/ -40° Celcius to 50° Celcius	Defend grade	IP65, NEMA4
Housing material	ABS plastic	Insulation	Thermal group H (200° C)
Connection	DIN43650A /DIN 43650 - A/ISO 4400	Valve / seals	Stainless steel 304 / FPM (Viton) seals
Indicators light	Green-on, Red-off	Mounting Positions	Horizontally or Vertically