


◆ Ordering Code

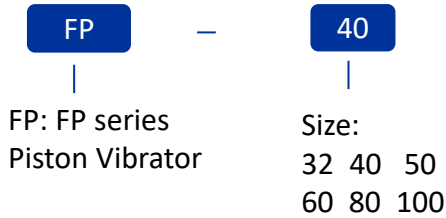

◆ Features

Features:

- Power, a small amount of lubrication, quiet
- Frequency 1560-485HZ
- Vibration force 265-6500N
- Continuous adjustable parameters (adjustable pressure)
- Maximum operating temperature: 150°C
- Can be customized 200°C
- Suitable for extreme bad environment

Application:

- Vibrating table
- Filter sieve
- Storage bin emptying
- Dispersing and compacting bulk material
- Preventing material hanging on the wall of bin
- Driving conveying device and discharging groove

◆ Structure

Aluminum shell, corrosion resistant, with special grease

◆ Dimension

Pneumatic Vibrator, FP series Piston Vibrator

	MODEL	B	K	L	A	R	H	D	Base
		mm	mm	mm	mm	mm	mm	G	(Shape)
	FP-32	92	60	45	7	57	15	1/8"	Round
	FP-40	123	80	47	9	59	15	1/8"	Round
	FP-50	143	94	54	11	68	15	1/4"	Round
	FP-60	186	120	67	11	92	20	3/8"	Round
	FP-80	192	115	82	13	114	20	3/8"	Square
	FP-100	155	150	124	13	138	20	3/8"	Square