


## ◆ 订购码 Ordering Code

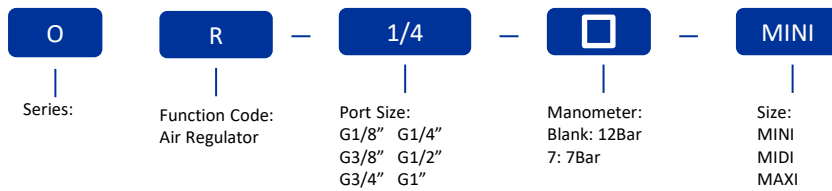

## ◆ 规格 Specification

Service Units		MINI			MIDI			MAXI	
Working Pressure: 12Bar		OR-1/8-MINI	OR-1/4-MINI	OR-3/8-MINI	OR-3/8-MIDI	OR-1/2-MIDI	OR-3/4-MIDI	OR-3/4-MAXI	OR-1-MAXI
Working Pressure: 7Bar, 40µm		OR-1/8-7-MINI	OR-1/4-7-MINI	OR-3/8-7-MINI	OR-3/8-7-MIDI	OR-1/2-7-MIDI	OR-3/4-7-MIDI	OR-3/4-7-MAXI	OR-1-7-MAXI
Manometer	0-12Bar	OMA-40-16-1/8			OMA-50-16-1/4				
	0-7Bar	OMA-40-10-1/8			OMA-50-10-1/4				
Medium		Filtered Compressed Air (Lubricated Or Non-Lubricated)							
Structure		MINI, MIDI Diaphragm type regulator; MAXI: Piston Regulator							
Mounting Type		Pipe mounting or foot mounting							
Assemble Position		Any							
Connection		G1/8"	G1/4"	G3/8"	G3/8"	G1/2"	G3/4"	G3/4"	G1"
Nominal Flow Rate	XOR-...	800	1500	1700	3200	3500	3500	11000	11500
	XOR-...-7-	1000	1600	1800	3300	4000	4500	12000	12500
Primary	Manual Drain	1~16bar							
Working Pressure		0.5~12bar/0.5~7bar							
Temperature Range		0~60℃							
Materials Information		Using :Zinc die-casting; Sealing : NBR ; Adjusting knob :POM							